

## Overview

This solar regulator uses Maximum Power Point Tracking (MPPT) technology to extract the maximum possible energy from solar panels. In this way it can typically harvest 25% more energy than standard solar regulators.

## Installation

The regulator should be installed horizontally or vertically as close to the leisure battery as possible but not inside the battery compartment. During operation the regulator may become warm, so ensure there is at least 10cm clear around the unit at all times.

For rapid installation, the regulator is provided with plug & play connectors, which are compatible with the Sargent solar panel range.



Pin	Colour	Function
A1	Yellow	Battery +VE
A2	Black	Battery -VE
B1	Red	Solar Panel +VE
B2	Black	Solar Panel -VE


Alternatively these connectors can be removed and wired using screw terminal block, as per the connection diagram.

### Wiring & Fusing

When fitting, try to keep cabling runs as short as possible and do not underrate, as this will lead to excessive voltage losses and reduced performance. Please refer to the table to select a suitable wiring gauge, length and recommended fuse rating.

Cable	Up to 5m	Up to 10m	Fuse
from Solar	1.5mm <sup>2</sup> 16AWG	2.0mm <sup>2</sup> 15AWG	-
to Battery	1.5mm <sup>2</sup> 16AWG	2.0mm <sup>2</sup> 15AWG	20A

## Connections

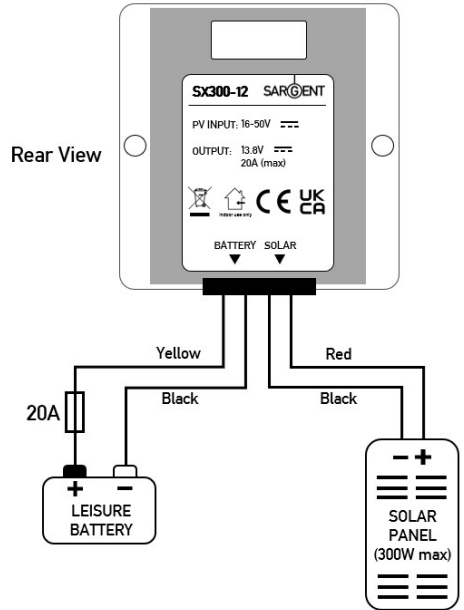

## Operation

The unit operates automatically to regulate power from the solar panel into a suitable charging voltage for the leisure battery. When the solar panel is exposed to sunlight, the regulator will automatically start to operate and no further action is necessary.

## Specification

Model	SX300-12
Power	300W (max)
Solar input voltage	17 - 25V
Output voltage	13.8V
Output current	20A (max)
Regulation method	MPPT
Standby current	15mA
Efficiency	96% (max)
Ingress rating	IP67
Weight	300g
Dimensions (L x W x H)	74 x 74 x 32mm
Cable length	250mm

**SARGENT**  
wired for innovation



**MPPT Solar Regulator  
Installation & User Instructions  
SX300-12**

**SARGENT**

**Sargent Electrical Services Ltd**  
Unit 39, Tokenspire Business Park, Beverley,  
East Yorks, HU17 0TB, UK  
Phone: +44(0)1482 881655  
Fax: +44(0)1482 678987  
Email: support@sargentltd.co.uk  
Tech Support: +44(0)1482 678981

